

PMC Addendum

PMC CD, PMC DVK, PMC DV C-Link/SC

Revision: A
January 2003

Control Information

Control Item	Details
Document Owner	Dan Boer
Information Label	EDT Public
Supersedes	None
File Location	frm/pmc/pmc.doc
Document Number	008-01356-00

Revision History

Revision	Date	Revision Description	Originator
A	14-Jan-03	Convert from FrameMaker; changes to title page, overview, installation, pinouts	S Vasil R Henderson

The information in this document is subject to change without notice and does not represent a commitment on the part of Engineering Design Team, Inc. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of the agreement.

Engineering Design Team, Inc. (“EDT”), makes no warranties, express or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose, regarding the software described in this document (“the software”). EDT does not warrant, guarantee, or make any representations regarding the use or the results of the use of the software in terms of its correctness, accuracy, reliability, currentness, or otherwise. The entire risk as to the results and performance of the software is assumed by you. The exclusion of implied warranties is not permitted by some jurisdictions. The above exclusion may not apply to you.

In no event will EDT, its directors, officers, employees, or agents be liable to you for any consequential, incidental, or indirect damages (including damages for loss of business profits, business interruption, loss of business information, and the like) arising out of the use or inability to use the software even if EDT has been advised of the possibility of such damages. Because some jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitations may not apply to you. EDT’s liability to you for actual damages for any cause whatsoever, and regardless of the form of the action (whether in contract, tort [including negligence], product liability or otherwise), will be limited to \$50.

No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, without the express written agreement of Engineering Design Team, Inc.

© Copyright Engineering Design Team, Inc. 1997–2003. All rights reserved.

Sun, SunOS, SBus, SPARC, and SPARCstation are trademarks of Sun Microsystems, Incorporated.

Windows NT/2000/XP is a registered trademark of Microsoft Corporation.

Intel and Pentium are registered trademarks of Intel Corporation.

UNIX is a registered trademark of X/Open Company, Ltd.

OPEN LOOK is a registered trademark of UNIX System Laboratories, Inc.

Red Hat is a trademark of Red Hat Software, Inc.

IRex is a trademark of Silicon Graphics, Inc.

AIX is a registered trademark of International Business Machines Corporation.

Xilinx is a registered trademark of Xilinx, Inc.

Kodak is a trademark of Eastman Kodak Company.

The software described in this manual is based in part on the work of the independent JPEG Group.

EDT and Engineering Design Team are trademarks of Engineering Design Team, Inc.

Contents

Overview.....	5
Installation.....	6
Connector Pinouts	7



Overview

The PMC CD, PMC DVK, and PMC C-Link/Single Channel (SC) boards are configurable DMA interfaces that can be adapted to different environments by making changes to the firmware. These boards are similar to their PCI counterparts; differences include the form factor, bus connector, and the PCI CD connector pinout.

- The PMC CD has a 68-pin connector, while the PCI CD has an 80-pin connector. For complete information on the PCI/PMC CD, see the *PCI CD User's Guide*, EDT part number 008-00965, available at www.edt.com.
- The PMC DVK and the PCI DVK both have a 68-pin connector. The PMC DVK implements a digital camera interface using parallel differential IO. For complete information on the PCI/PMC DVK, see the *PCI DV Family User's Guide*, EDT part number 008-00966, available at www.edt.com.
- The PMC C-Link/SC has one 26-pin connector, while the PCI C-Link has two 26-pin connectors. The PMC C-Link implements a camera interface following the Camera Link standard for digital cameras and frame grabbers. For complete information on PCI/PMC DV C-Link/SC, see the *PCI DV Family User's Guide*, EDT part number 008-00966, available at www.edt.com.

For more information on PMC boards, see the IEEE P1386.1 document *Draft Standard Physical and Environmental Layers for PCI Mezzanine Cards* available from:

IEEE Standards Department
345 East 47th Street
New York, NY 10017
USA

Installation

Install the PMC board in any VME or compact PCI host, according to the instructions for your host. If your host doesn't have the appropriate spacers, use the spacers and screws provided with the EDT PMC board, as shown in Figure 1.

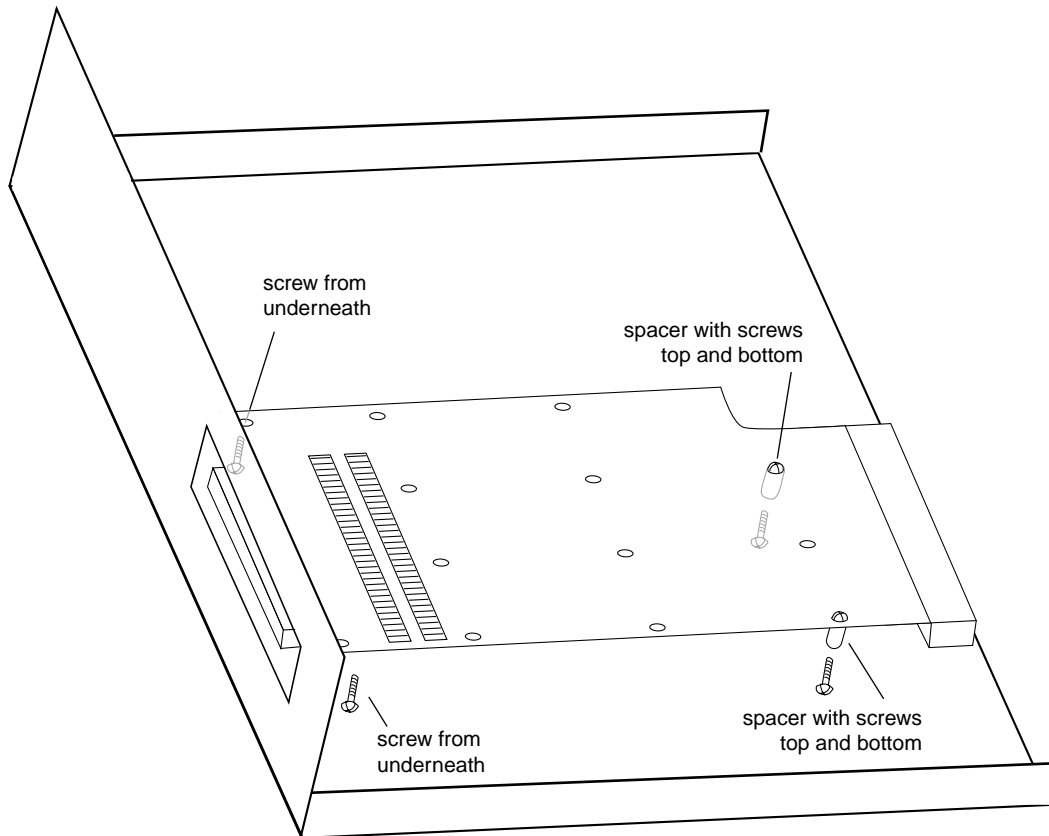


Figure 1. Installing the PMC Board

To shield the PMC board from electromagnetic interference, the board is shipped with a conductive O-ring around the outside of the bezel to which the 68-pin (PMC CD, PMC DVK) or MDR-26 (PMC DV C-Link/SC) connector is attached. When installed, this O-ring is not visible from outside the host. Be careful not to damage it when installing the board.

Connector Pinouts

The PMC CD and PMC DVK boards connect to a high-density 68-pin I/O connector, AMP part number 749621-7, with a straight-shielded backshell, AMP P/N 750752-1, with thumbscrews.

Table 1 describes the connection from the PMC CD board to the cable.

AMP	Signal	AMP	Signal
1	TXT+	35	TXT-
2	DAT0+	36	DAT0-
3	DAT1+	37	DAT1-
4	DAT2+	38	DAT2-
5	DAT3+	39	DAT3-
6	DAT4+	40	DAT4-
7	DAT5+	41	DAT5-
8	DAT6+	42	DAT6-
9	DAT7+	43	DAT7-
10	DAT8+	44	DAT8-
11	DAT9+	45	DAT9-
12	STAT3+	46	STAT3-
13	DAT10+	47	DAT10-
14	DAT11+	48	DAT11-
15	DAT12+	49	DAT12-
16	DAT13+	50	DAT13-
17	FUNCT1+	51	FUNCT1-
18	FUNCT2+	52	FUNCT2-
19	DAT14+	53	DAT14-
20	DAT15+	54	DAT15-
21	SPARE0+	55	SPARE0-
22	STAT0+	56	STAT0-
23	FUNCT0+	57	FUNCT0-
24	Reserved	58	Reserved
25	DNR+	59	DNR-
26	IDV+	60	IDV-
27	STAT1+	61	STAT1-
28	STAT2+	62	STAT2-
29	RXT+	63	RXT-
30	FUNCT3+	64	FUNCT3-
31	SENDT+	65	SENDT-
32	ODV+	66	ODV-
33	BNR+	67	BNR-
34	Ground	68	Ground

Table 1. PMC CD Pinout

Table 2 describes the connection from the PMC CD and board to the cable, when using *ssd4.bit file*.

AMP	Signal	AMP	Signal
1	Reserved	35	Reserved
2	CH1D0+	36	CH1D0-
3	CH1D1+	37	CH1D1-
4	CH1D2+	38	CH1D2-
5	CH1D3+	39	CH1D3-
6	CH2D0+	40	CH2D0-
7	CH2D1+	41	CH2D1-
8	CH2D2+	42	CH2D2-
9	CH2D3+	43	CH2D3-
10	CH3D0+	44	CH3D0-
11	CH3D1+	45	CH3D1-
12	Reserved	46	Reserved
13	CH3D2+	47	CH3D2-
14	CH3D3+	48	CH3D3-
15	CH4D0+	49	CH4D0-
16	CH4D1+	50	CH4D1-
17	Reserved	51	Reserved
18	Reserved	52	Reserved
19	CH4D2+	53	CH4D2-
20	CH4D3+	54	CH4D3-
21	Reserved	55	Reserved
22	Reserved	56	Reserved
23	CH2CLK+	57	CH2CLK-
24	CH3CLK+	58	CH3CLK-
25	Reserved	59	Reserved
26	Reserved	60	Reserved
27	Reserved	61	Reserved
28	Reserved	62	Reserved
29	CH1CLK+	63	CH1CLK-
30	CH4CLK+	64	CH4CLK-
31	Reserved	65	Reserved
32	Reserved	66	Reserved
33	Reserved	67	Reserved
34	Ground	68	Ground

Table 2. PMC CD Pinout for ssd, ssd2, and ssd4

Table 3 describes the connection from the PMC DVK board to the cable, for single channel operation.

AMP	Signal	AMP	Signal
1	Reserved	35	Reserved
2	MSB0+	36	MSB0-
3	MSB1+	37	MSB1-
4	MSB2+	38	MSB2-
5	MSB3+	39	MSB3-
6	MSB4+	40	MSB4-
7	MSB5+	41	MSB5-
8	MSB6+	42	MSB6-
9	MSB7+	43	MSB7-
10	MSB8+	44	MSB8-
11	MSB9+	45	MSB9-
12	Reserved	46	Reserved
13	MSB10+	47	MSB10-
14	MSB11+	48	MSB11-
15	MSB12+	49	MSB12-
16	MSB13+	50	MSB13-
17	Reserved	51	Reserved
18	Reserved	52	Reserved
19	MSB14+	53	MSB14-
20	MSB15+	54	MSB15-
21	Reserved	55	Reserved
22	SER CNTRL OUT+	56	SER CNTRL OUT-
23	SER CNTRL IN+	57	SER CNTRL IN-
24	Reserved	58	Reserved
25	FRME ENA+	59	FRME ENA-
26	LINE ENA+	60	LINE ENA-
27	Reserved	61	Reserved
28	Reserved	62	Reserved
29	PIX DATA STRB+	63	PIX DATA STRB-
30	EXPOSE+	64	EXPOSE-
31	MC0+	65	MC0-
32	MC1+	66	MC1-
33	MC2+	67	MC2-
34	Ground	68	Ground

Table 3. PMC DVK Pinout (Single-Channel Grayscale Cameras)

Table 4 describes the connection from the PMC DVK board to the cable, for dual channel operation.

AMP	Signal	AMP	Signal
1	Reserved	35	Reserved
2	AMSB0+	36	AMSB0-
3	AMSB1+	37	AMSB1-
4	AMSB2+	38	AMSB2-
5	AMSB3+	39	AMSB3-
6	AMSB4+	40	AMSB4-
7	AMSB5+	41	AMSB5-
8	AMSB6+	42	AMSB6-
9	AMSB7+	43	AMSB7-
10	BMSB0+	44	BMSB0-
11	BMSB1+	45	BMSB1-
12	Reserved	46	Reserved
13	BMSB2+	47	BMSB2-
14	BMSB3+	48	BMSB3-
15	BMSB4+	49	BMSB4-
16	BMSB5+	50	BMSB5-
17	Reserved	51	Reserved
18	Reserved	52	Reserved
19	BMSB6+	53	BMSB6-
20	BMSB7+	54	BMSB7-
21	AMSB8+	55	AMSB8-
22	SER CNTRL OUT+	56	SER CNTRL OUT-
23	SER CNTRL IN+	57	SER CNTRL IN-
24	Reserved	58	Reserved
25	FRME ENA+	59	FRME ENA-
26	LINE ENA+	60	LINE ENA-
27	Reserved	61	Reserved
28	Reserved	62	Reserved
29	PIX DATA STRB+	63	PIX DATA STRB-
30	EXPOSE+	64	EXPOSE-
31	AMSB9+	65	AMSB9-
32	BMSB8+	66	BMSB8-
33	BMSB9+	67	BMSB9-
34	Ground	68	Ground

Table 4. PMC DVK Pinout (Dual-Channel Grayscale Cameras)

PCI DVK Pin	PCI DVK Signal	AIA Signal	PCI DVK Pin	PCI DVK Signal	AIA Signal
1	Ground	Ground	35	Ground	Ground
2	VDR0 +	RedMSB0 +	36	VDR0 –	RedMSB0 –
3	VDR1 +	Red MSB1 +	37	VDR1 –	RedMSB1 –
4	VDR2 +	Red MSB2 +	38	VDR2 –	Red MSB2 –
5	VDR3 +	Red MSB3 +	39	VDR3 –	Red MSB3 –
6	VDR4 +	Red MSB4 +	40	VDR4 –	Red MSB4 –
7	VDR5 +	Red MSB5 +	41	VDR5 –	Red MSB5 –
8	VDR6 +	Red MSB6 +	42	VDR6 –	Red MSB6 –
9	VDR7 +	Red MSB7 +	43	VDR7 –	Red MSB7 –
10	VDG0 +	GrnMSB0 +	44	VDG0 –	GrnMSB0 –
11	VDG1 +	GrnMSB1 +	45	VDG1 –	GrnMSB1 –
12	Ground	Ground	46	Ground	Ground
13	VDG2 +	GrnMSB2 +	47	VDG2 –	GrnMSB2 –
14	VDG3 +	GrnMSB3 +	48	VDG3 –	GrnMSB3 –
15	VDG4 +	GrnMSB4 +	49	VDG4 –	GrnMSB4 –
16	VDG5 +	GrnMSB5 +	50	VDG5 –	GrnMSB5 –
17		not used	51		not used
18	VDB4 +	BluMSB4 +	52	VDB4 –	BluMSB4 –
19	VDB6 +	GrnMSB6 +	53	VDB6 –	GrnMSB6 –
20	VDB7 +	GrnMSB7 +	54	VDB7 –	GrnMSB7 –
21	VDB0 +	BluMSB0 +	55	VDB0 –	BluMSB0 –
22	SCNTLO +	Serial Control Out +	56	SCNTLO –	Serial Control Out –
23	SCNTLI +	Serial Control In +	57	SCNTLI –	Serial Control In –
24	VDB5 +	BluMSB5 +	58	VDB5 –	BluMSB5 –
25	FRME +	Frame Enable +	59	FRME –	Frame Enable –
26	LINE +	Line Enable +	60	LINE –	Line Enable –
27	VDB6 +	BluMSB6 +	61	VDB6 –	BluMSB6 –
28	VDB7 +	BluMSB7 +	62	VDB7 –	BluMSB7 –
29	PSTRB +	Pixel Strobe +	63	PSTRB –	Pixel Strobe –
30	EXPOSE +	EXPOSE +	64	EXPOSE –	EXPOSE –
31	VDB1 +	BluMSB1 +	65	VDB1 –	BluMSB1 –
32	VDB2 +	BluMSB2 +	66	VDB2 –	BluMSB2 –
33	VDB3 +	BluMSB3 +	67	VDB3 –	BluMSB3 –
34	Ground	Ground	68	Ground	Ground

Table 5. PMC DVK Pinout (Single-Channel Color Cameras)

Shading denotes out to camera.

The PMC DV C-Link/SC connects to an MDR-26 pin connector (Camera Link standard). Table 6 describes the pinout for the PMC DV C-Link/SC.

Base Configuration (with Camera Control and Serial Communication)		
Camera Connector	Frame Grabber Connector	Channel Link Signal
1	1	Inner Shield
14	14	Inner Shield
2	25	X0-
15	12	X0+
3	24	X1-
16	11	X1+
4	23	X2-
17	10	X2+
5	22	Xclk-
18	9	Xclk+
6	21	X3-
19	8	X3+
7	20	SerTC+
20	7	SerTC-
8	19	SerTFG-
21	6	SerTFG+
9	18	CC1-
22	5	CC1+
10	17	CC2+
23	4	CC2-
11	16	CC3-
24	3	CC3+
12	15	CC4+
25	2	CC4-
13	13	Inner Shield
26	26	Inner Shield

Table 6. PMC DV C-Link/SC Pinout